

Valves

Reject-Valves

SKF-ZFF673X-10C



Applications




General usage

- media with reject fraction (e.g. nails and staples)
- coarse-grained media
- granulates
- powders
- temperature range to 80 °C
- see table for permitted operating pressure

Locations

- extraction devices for heavy soiling applications
- dumping and emptying devices for heavy soiling applications
- cleaning machines

Media



Accessories

On the inlet side:

stainless steel intermediate flange, allows connection to round DIN EN 1092-1, PN 10 pipes or to locks (approx. 20 mm thick, drilled for both flange patterns)

On the outlet side:

stainless steel adapter, square to round, allows outlet to be continued on round DIN EN 1092-1, PN 10 pipes

Options:

- holding parts and switching sensors for limit switches, suitable for all common types of limit switch
- solenoid valve attached directly to the pneumatic cylinder
- housing and valve plate in other materials (as required by customer)

Features

Rectangular model

- free passage when opened
- the outlet is larger than the inlet, allowing unwanted materials to fallout freely
- braking of a rotation in progress

Valve plate

- highly wear-resistant version made from hardened stainless steel
- prepared so that switch sensors may be connected for limit position monitoring

Valve plate guide

- the guides in the front third are shortened, i.e. the valve plate guarantees a clearance
- replaceable sliding rails made from bronze

Sealing frame

- protects the sliding plate and sliding plate guide
- low-wear, material: SBR
- plug-in connection system makes replacement easy
- 2-in-1 system:
 1. flow seal
 2. flange seal (no additional flange seal required)

Watertight

- Leak test according to DIN EN 12266-02:2012-04
Table A5, test medium liquid, leakage rate A


Materials

- housing EN-GJL-250 (GG 25)
or
1.4571
- valve plate 1.4571 hardened
- sealing frame SBR
- slide borders CuAl10Ni5Fe4
- packing assembly Arostat / EPDM
- bracket 1.4301
- max. operating pressure



DN 50 – 250	8 bar
DN 300	4 bar
DN 350 – 600	2 bar
- max. operating temperature 80° C

Flange bores for SIKAIFU ZFF-valves with metric thread according to SIKAIFU standard

Inlet site

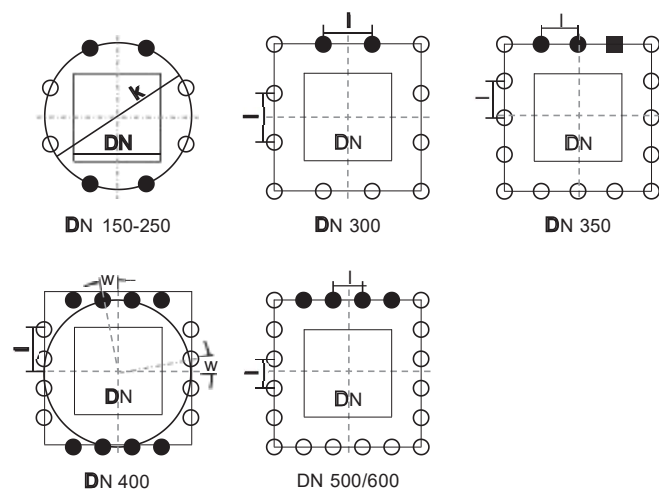

Outlet site

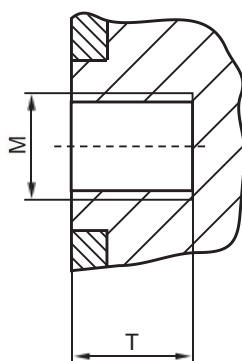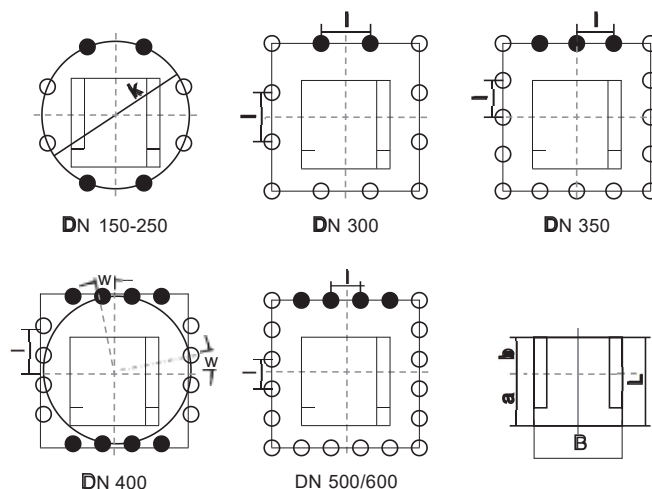


Z = total number of holes
 Z1 = number of joint-holes
 Z2 = number of through-going bores
 T = usable depth of thread



DN [mm]	K [mm]	Z	M	T [mm]	Z1	Z2	l [mm]	w [°]	L [mm]	B [mm]	a [mm]	b [mm]
150	240	8	M20	18	4	4			156	167	83	73
200	295	8	M20	20	4	4			211	222	111	100
250	350	8	M20	22	4	4			260	270	135	125
300		12	M20	24	2	10	129		317	335	167	150
350		16	M20	26	3	13	110		367	385	192	175
400	515	16	M24	24	8	8	170	11,25	418	437	218	200
500		20	M24	34	4	16	121		520	540	270	250
600		20	M27	35	4	16	143		620	640	320	300

Flange bores for SIKAIFU ZFF valves with UNC thread according SIKAIFU standard

Inlet side

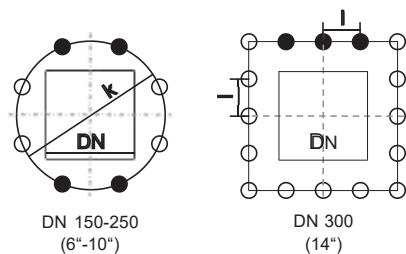


Outlet side

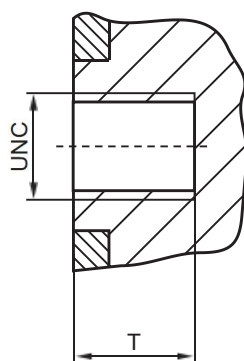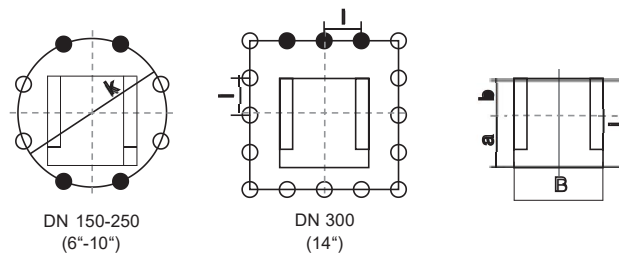

Z = total number of holes
 Z1 = number of joint-holes
 Z2 = number of through-going bores
 T = usable depth of thread

DN [mm]	K [inch]	Z	UNC [inch]	T [inch]	Z1	Z2	l [inch]	w [°]	L [mm]	B [mm]	a [mm]	b [mm]
150	9 1/2	8	3/4	11/16	4	4			156	167	83	73
200	11 3/4	8	3/4	3/4	4	4			211	222	111	100
250	14 1/4	8	7/8	7/8	4	4			260	270	135	125
300		16	1	1	3	13	4 5/16		317	335	167	150


Reject-valve
square in- and outlet
pneumatic cylinder and protection guard
Housing EN-GJL-250 or stainless steel

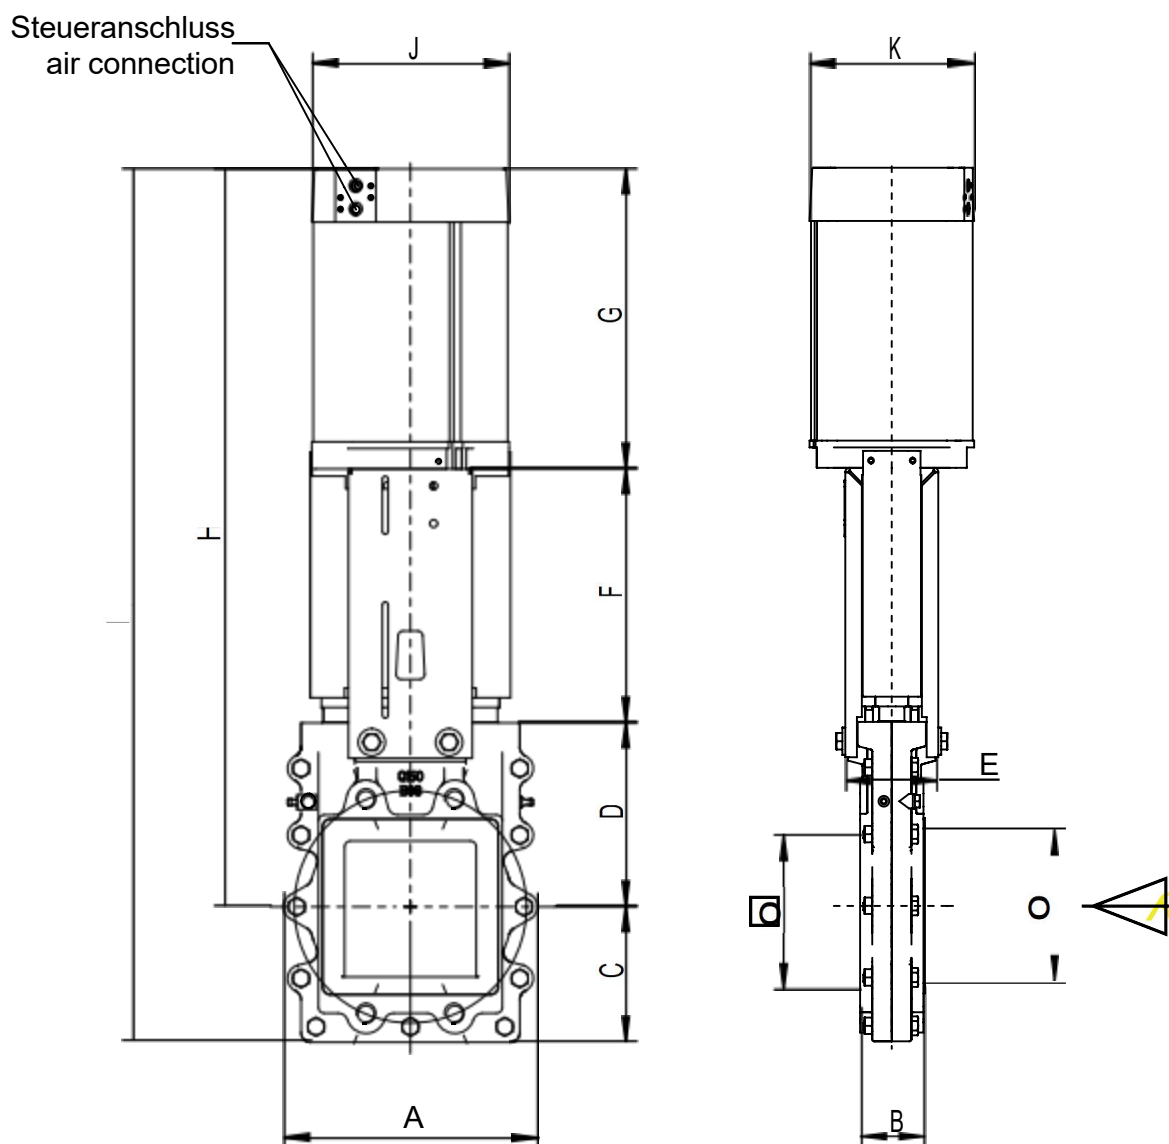

DN	BD [bar]	A	B	C	D	E	F	G	H	I	J	K	cyl Ø	air con- nection	weight ~[kg]	
															EN- GJL-250	stainless steel
150	8	263	67	140	190	96	263	310	763	903	204	170	160	G 1/4"	43.4	45.4
200	8	360	72	180	260	120	310	360	930	1110	204	170	160	G 1/4"	79.5	64.5
250	8	390	81	195	270	120	362	433	1065	1260	244	211	200	G 1/2"	88	87
300	4	470	81	235	340	120	419	515	1274	1509	242	283	230	G 1/2"	140	140
350	2	510	92	260	365	160	509	575	1449	1709	242	283	230	G 1/2"	214	214

Dimensions in mm, flange bores on request; air connection acc. VDI/VDE 3845 (NAMUR).
 Further sizes on request.

Reject-valve
square in- and outlet
pneumatic cylinder and protection guard
Housing EN-GJL-250 or stainless steel

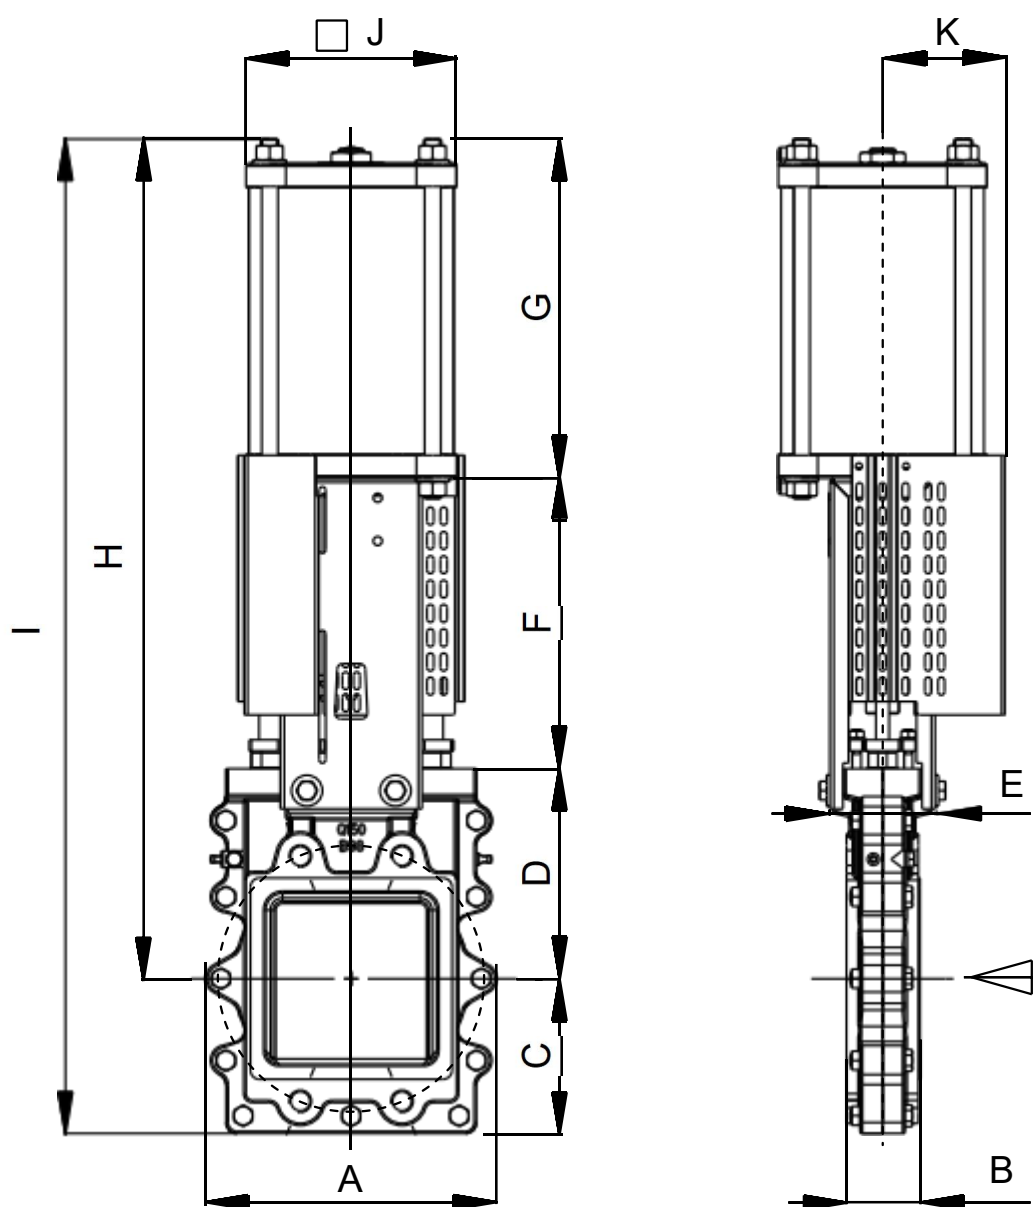

DN	BD [bar]	A	B	C	D	E	F	G	H	I	J	K	cyl Ø	air con- nection	weight ~[kg]	
															EN- GJL-250	stainless steel
400	2	570	92	285	410	160	608	621	1639	1924	318	318	300	G 1/2"	243	250
500	2	690	112	345	510	182	735	721	1966	2311	318	318	300	G 1/2"	397	408
600	2	770	111	400	570	161	850	889	2309	2709	425	425	400	G 3/4"	572	572

Dimensions in mm, flange bores on request.
 Further sizes on request.